



Steel profile system

Industrial Steel Group Company is producing steel constructions, fireproof wall sections and doors in steel or stainless steel for inner our outdoor use.

In our production we are using Stalprofil AB (Sweden) profile systems, which have proved themself in the building markets from the best side and meet all of European standarts for fire resistance, sound insulation, thermoinsulation, burglary resistance and have all according certificates.

Stalprofil AB profile systems are used in public buildings, offices, houses, appartments, hospitals, schools, hotels, sports complexes, banks, airports, industrial buildings other establishments.

SP 35000 Profile system without insulation, insulated with a broken thermal bridge or fire insulated steel profiles for glazed doors, sliding doors, partition walls and window sections.

SP 56500 Profile system with a broken thermal bridge for doors- and entrance sections, exhibition window partitions and curtain walling.

SP 76500 SP / 711000 / SP 79000 Fire insulated profile system with a core of fire resistant insulation for glazed doors, sliding doors, partition walls and window sections.



SP 56500


56500 Profile systems designed for door, wall and window sections in offices, business premises, schools, hotels, airports, sports arenas, hospitals and service homes etc.

The systems are modern and offer maximum flexibility, safety and stability. The systems offer a variety of choices for interior design. Each system offers finger trap proof gasket, rounded windows and arches and are available in wide profiles for module locks. The innovative design of the systems with tracks for rubber sealing, create smooth interior and exterior surfaces on doors and intersecting wall partitions complying with architectural requirements.

Steel offers unlimited choices with regard to colour and is environment friendly. The increased stability, and resistance to other external forces compared to other materials combined with an attractive purchase price and low total cost of ownership are factors contributing to steel being the material of choice.



SP 56500

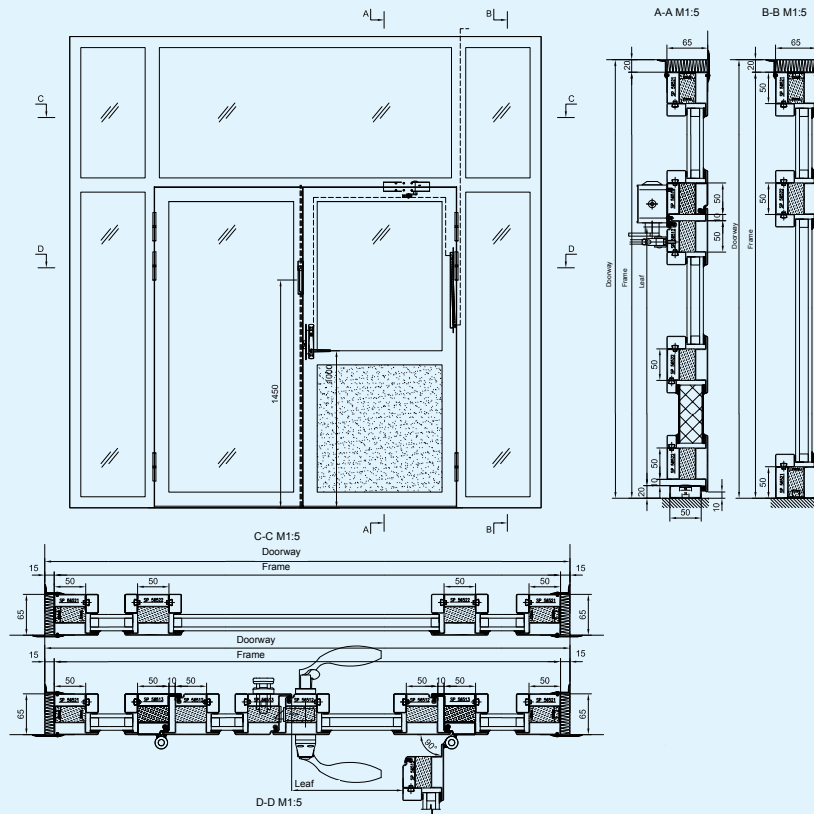


SP 76500 / SP 976500

The system is developed for the production of fireproof door and wall sections. The demand for steel and stainless steel profile systems for fire safety doors, windows, wall sections and sliding doors has increased dramatically from year to year. Stålprofilers systems enable you to comply with fire safety standards and regulations on fire safety doors, windows, wall and sliding door sections. Thermal-insulated system 25 mm with Promatec fireproof insulate materials. The profiles have a sealing groove that ensures a flat surface both inside and outside. The system SP976500 is a stainless steel profile system that is of acid-proof quality and is specially customized for corrosion resistance and good resistance to external effects. Glazing beads and assembly screws are made of stainless material.

SP76500/SP976500 profile systems have obtained approval for fire resistance classes EI 30/EI 60.



SP 76500 (EI 30, EI 60)

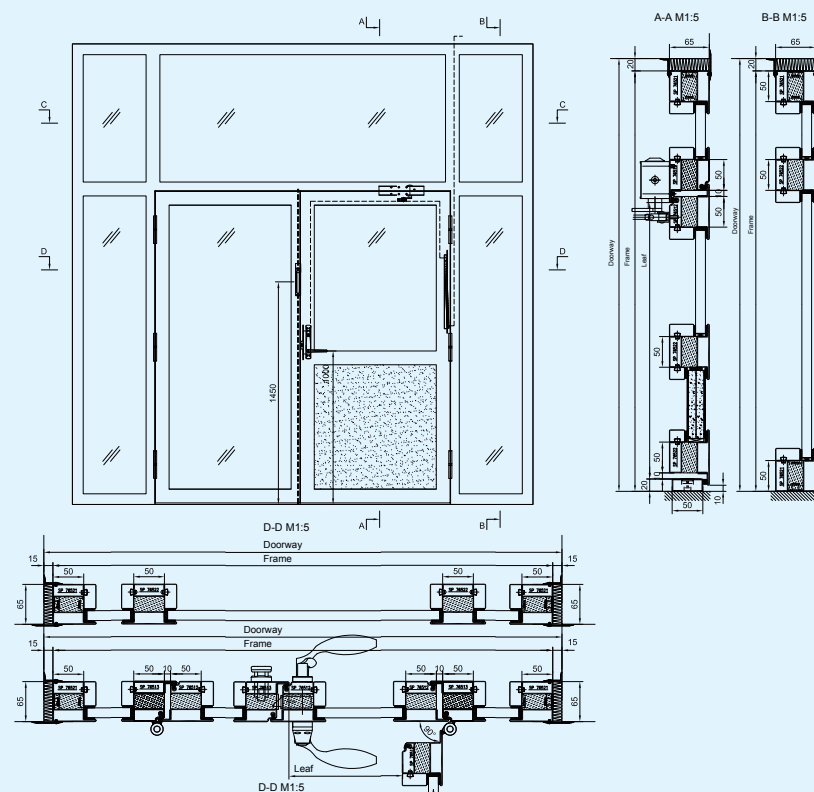

SP 35000 / SP 95000

Uninsulated, thermal-insulated and fireproof-insulated steel profiles. The profile systems are designed for door, sliding door, wall and window sections in offices, places of business, blocks of flats, schools, hotels, sports arenas, hospitals and service homes.



The systems are modern and provide maximum flexibility, safety and stability. They offer a variety of choices for interior design and are type approved. Each system has finger trap proof rear edging, rounded windows and arches. The systems are available in wide profiles for module locks.

The system SP95000 is a stainless steel profile system that is of acid-proof quality and is specially customized for corrosion resistance and good resistance to external effects. Glazing beads and assembly screws are made of stainless material.


SP35000/SP95000 profile systems have obtained approval for fire resistance classes E 30/E 60.



SP 35000 / SP 95000 (E 30, E 60)

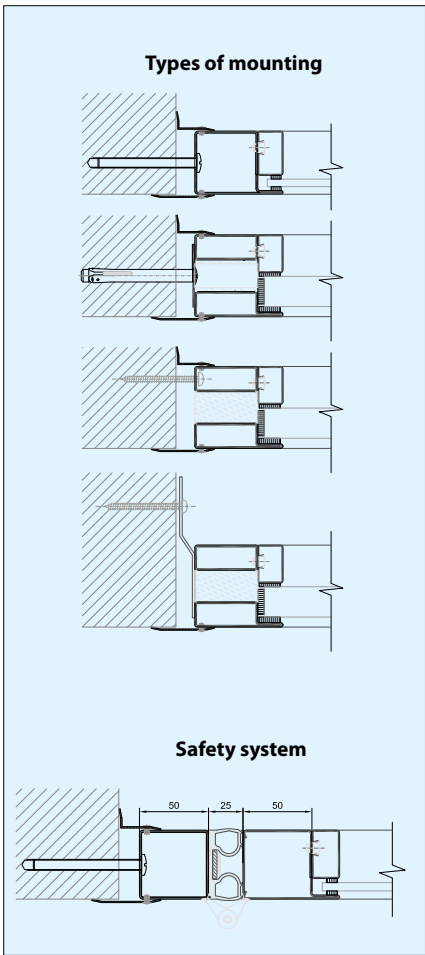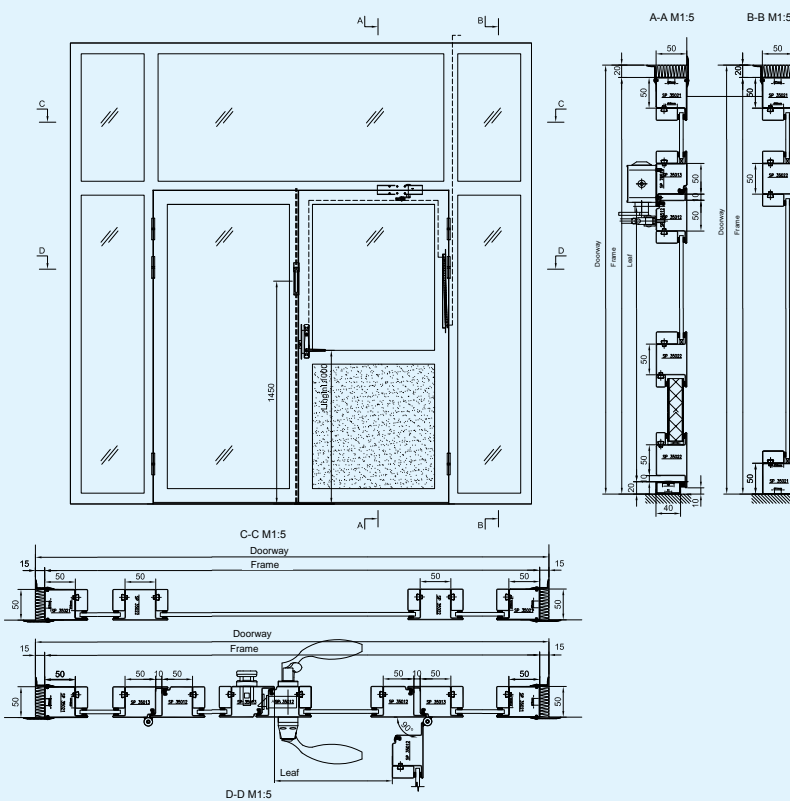

SP 35000 / SP 95000 (sliding)

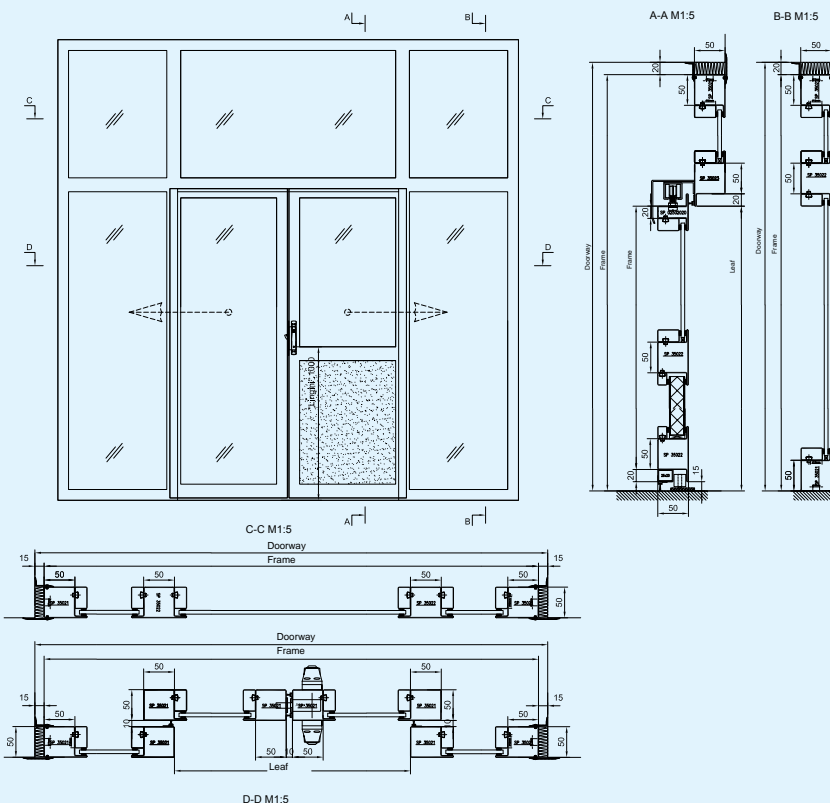

Glazing

According to specification or fire requirements.

Filling

Full or partial, according to certificates (see drawings).

Accessories

According to specification or at customer will (ASSA, ABLOY, Nemeff etc.). For sliding doors can be used Tormax, Besam or Dorma automatics.

Finishing

Powder coating in standard RAL colour tone

