

Properties

Fire classification	EI ₂ -30 / EI ₂ -60
Smoke tightness classification	C5S _a , C5S ₂₀₀
Burglar Resistance	RC3
Resistance to Wind Load	C3
Water tightness	4A/6B
Air permeability, class	3-4
Acoustic performance Rw	42 dB
Thermal isolation	1.6
Opening	C5

Size range


Max	
Height	3000 mm
Single door width	1300 mm
Double door width	2800 mm

Door leaf



Thickness	63 mm
Sheet thickness (Zn)	1 mm
Rebate	15 mm
Filling	Stone wool
Finish	Powdercoating
In one level with the frame	
Rubber sealing around the perimeter	

Frame


Thickness	110 mm
Sheet thickness (Zn)	1,5 mm

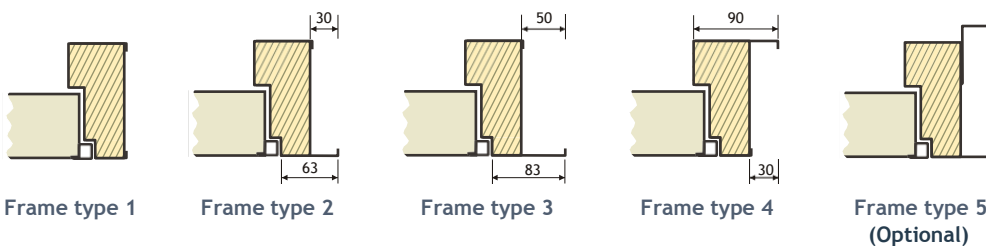


Thresholds

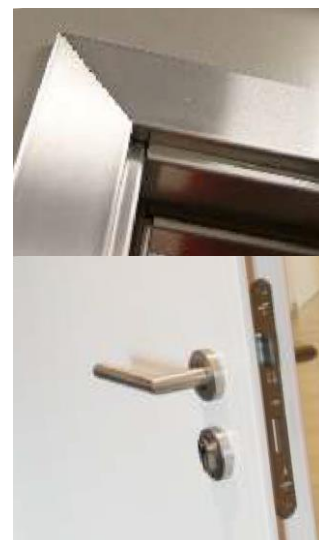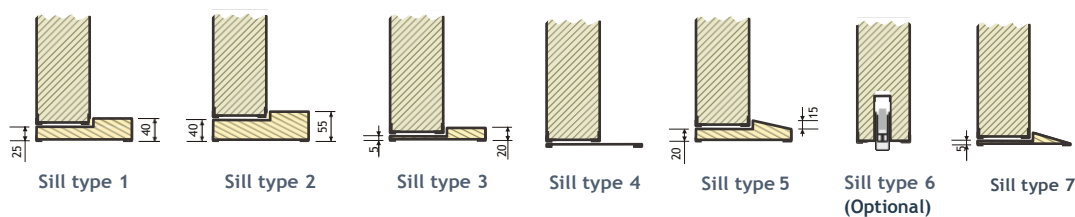

Doorset sections

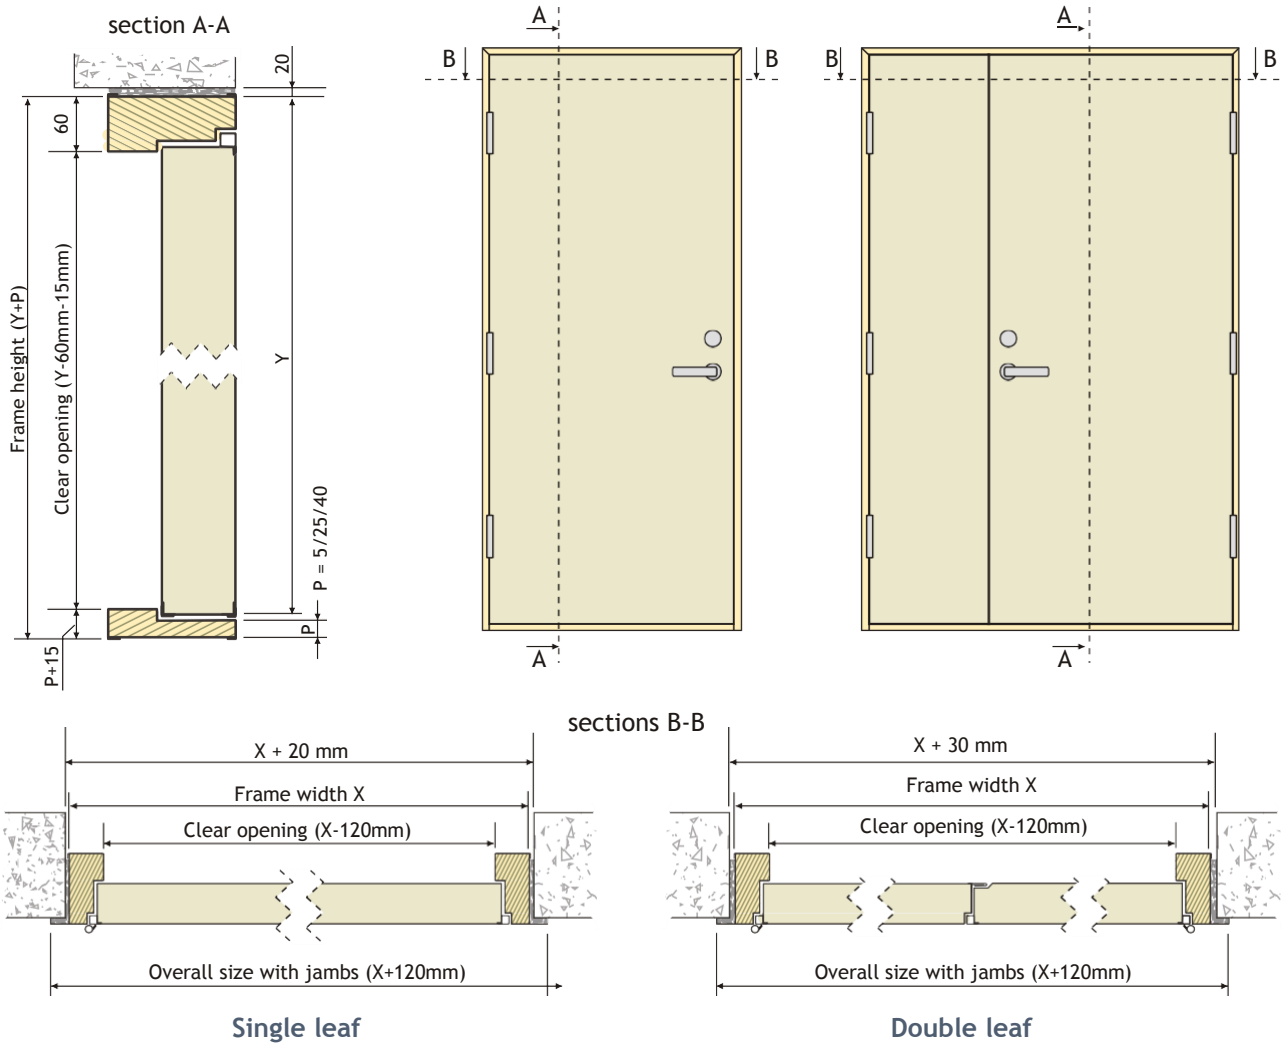

Handing chart

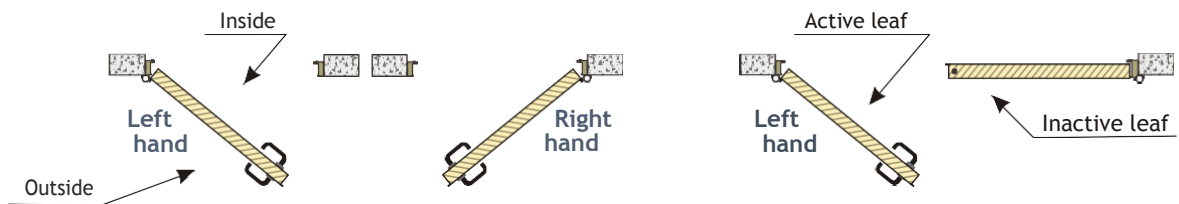

Optional

